



FREE FLOAT STEAM TRAP

MODEL J5SX STAINLESS STEEL

FREE FLOAT STEAM TRAP WITH THERMOSTATIC AIR VENTING

Features

An all-stainless steel free float steam trap for increased durability with tight shutoff for use on small to medium-size process equipment.

1. Self-modulating free float provides continuous, smooth, low velocity condensate discharge as process loads vary.
2. Only one moving part, the free float, eliminates concentrated valve wear and provides a long maintenance-free service life.
3. Thermostatic capsule (X-element) with "fail open" feature vents air automatically until close-to-steam temperature.
4. Easy, inline access to internal parts simplifies cleaning and reduces maintenance costs.
5. Built-in screen with large surface area ensures extended trouble-free service.



Specifications


Model		J5SX	
Connection		Screwed	Flanged
Size		3/4", 1", 1 1/4", 1 1/2"	DN 20, 25
Orifice No.		2, 5, 10, 21	
Maximum Operating Pressure (barg)	PMO	2, 5, 10, 21	
Maximum Differential Pressure (bar)	ΔPMX	2, 5, 10, 21	
Maximum Operating Temperature (°C)	TMO	220	
Subcooling of X-element Fill (°C)		up to 6	
Type of X-element		B	

PRESSURE SHELL DESIGN CONDITIONS (NOT OPERATING CONDITIONS): Maximum Allowable Pressure (barg) PMA: 21 1 bar = 0.1 MPa
Maximum Allowable Temperature (°C) TMA: 220



To avoid abnormal operation, accidents or serious injury, DO NOT use this product outside of the specification range. Local regulations may restrict the use of this product to below the conditions quoted.

No.	Description	Material	DIN*	ASTM/AISI*
①	Body	Cast Stainl. Stl. A351 Gr. CF8	1.4312	—
②	Cover	Cast Stainl. Stl. A351 Gr. CF8	1.4312	—
③ ^F	Float	Stainless Steel SUS316L	1.4404	AISI316L
④	Orifice Plug	Cast Stainl. Stl. A351 Gr. CF8	1.4312	—
⑤ ^{MR}	Orifice Plug Gasket	Stainless Steel SUS316L	1.4404	AISI316L
⑥ ^R	Orifice	—	—	—
⑦ ^{MR}	Orifice Gasket	Stainless Steel SUS316L	1.4404	AISI316L
⑧ ^R	Screen inside/outside	Stainless Steel SUS430/SUS304	1.4016/ 1.4301	AISI430/ AISI304
⑨ ^{MR}	Cover Gasket	Fluorine Resin PTFE	PTFE	PTFE
⑩	Nameplate	Stainless Steel SUS304	1.4301	AISI304
⑪ ^R	Float Cover	Stainless Steel SUS304	1.4301	AISI304
⑫ ^R	X-element Guide	Stainless Steel SUS304	1.4301	AISI304
⑬ ^R	X-element	Stainless Steel	—	—
⑭ ^R	Spring Clip	Stainless Steel SUS304	1.4301	AISI304
⑮ ^R	Air Vent Valve Seat	Stainless Steel SUS420F	1.4028	AISI420F
⑯	Connector	Stainless Steel SUS416	1.4005	AISI416
⑰	Cover Bolt	Stainless Steel SUS304	1.4301	AISI304
⑱	Flange**	Cast Stainl. Stl. A351 Gr. CF8	1.4312	—
⑲	Drain Plug Gasket***	Stainless Steel SUS316L	1.4404	AISI316L
⑳	Drain Plug***	Stainless Steel SUS303	1.4305	AISI303

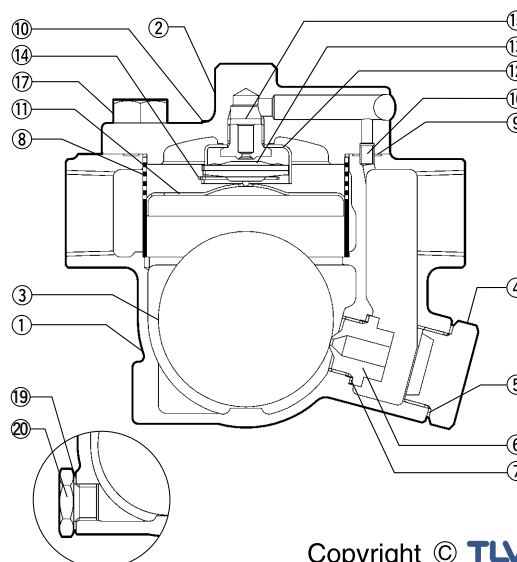


Copyright © TLV

* Equivalent materials ** Shown overleaf *** Option
Replacement kits available: (M) maintenance parts, (R) repair parts, (F) float

Dimensions

● **J5SX** Screwed

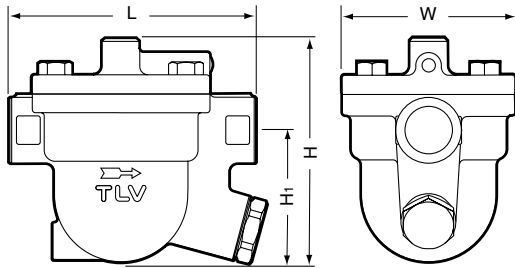


J5SX Screwed* (mm)

Size	L	H	H ₁	W	Weight (kg)
3/4"	155	141	83	108	4.4
1"					4.3
1 1/4"	160	174	105		5.8
1 1/2"					

* BSP DIN 2999, other standards available

● **J5SX** Flanged

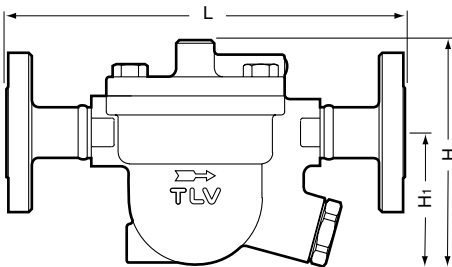


J5SX Flanged (mm)

Size	L		H	H ₁	Weight* (kg)
	ASME Class				
	150RF	300RF			
20	250	250	141	83	6.6
25	270	270			7.2

* Weight is for Class 300 RF

Discharge Capacity

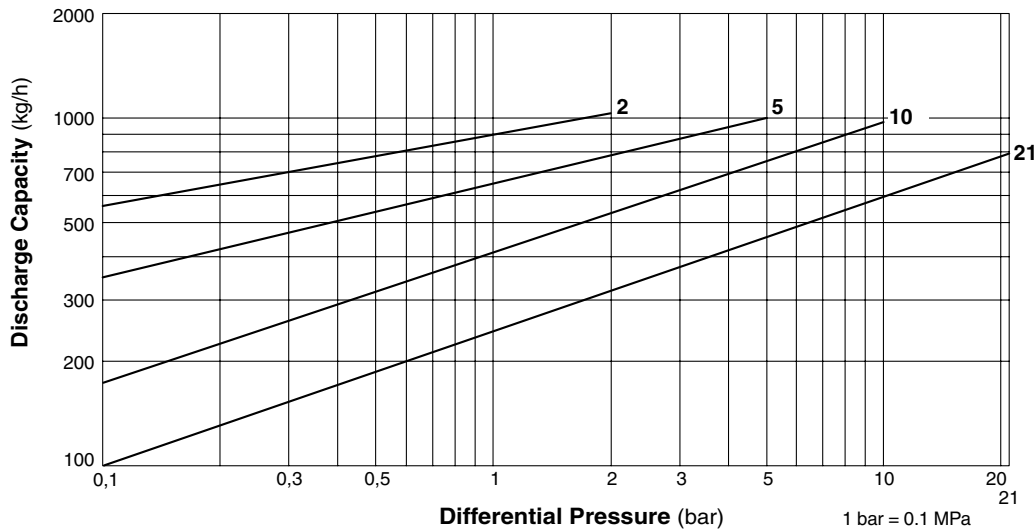

1. Line numbers within the graph are orifice numbers.
2. Differential pressure is the difference between the inlet and outlet pressure of the trap.
3. Capacities are based on continuous discharge of condensate 6°C below saturated steam temperature.
4. Recommended safety factor: at least 1.5.



Do not use traps under conditions that exceed maximum differential pressure, as condensate backup will occur!

Manufacturer

ISO 9001/ISO 14001

TLV CO., LTD.
Kakogawa, Japan

is approved by LRQA Ltd. to ISO 9001/14001

